


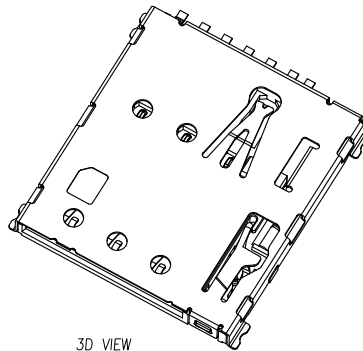


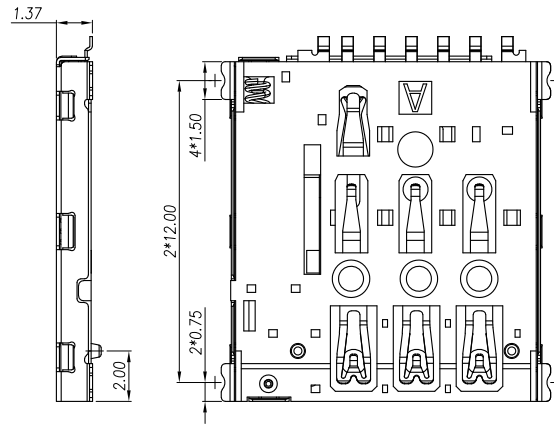

| REV | EC No. | DESCRIPTION | Symbol | DATE          |
|-----|--------|-------------|--------|---------------|
| A   | /      | new release | /      | Jan. 12, 2021 |
|     |        |             |        |               |
|     |        |             |        |               |

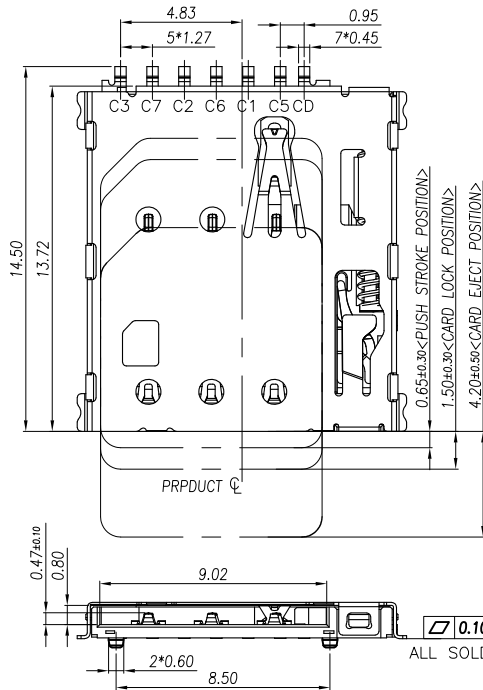

3D VIEW

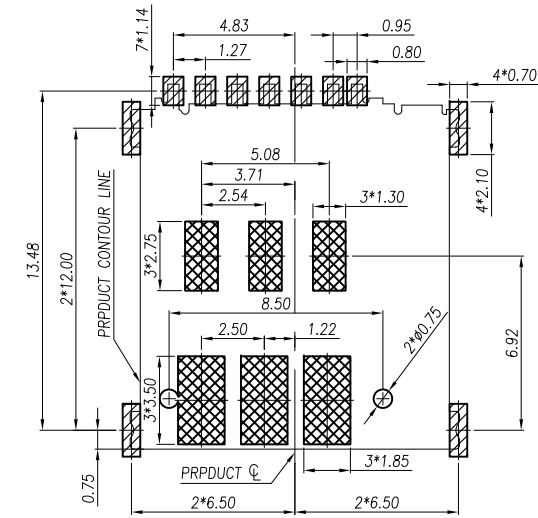


RECOMMENDED PCB LAYOUT TOP VIEW (TOLERANCE:±0.05)

RECOMMENDED MATA MASK T=0.12mm

SMT SOLDER AREA

NO PATTERN AND VIA HOLE IN HTIS AREA

| PIIN/NO | ASSIGNMENT    |
|---------|---------------|
| C1      | VCC           |
| C2      | RST           |
| C3      | CLK           |
| CD      | Detect Switch |
| C5      | GND           |
| C6      | VPP           |
| C7      | I/O           |

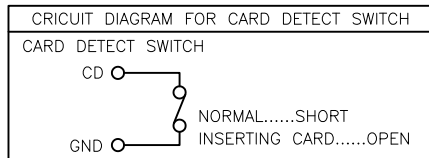

#### NOTE:

##### 1.MATERIAL:

HOUSING: THERMOPLASTICS,LCP,BLACK,UL 94V-0  
CONTACT: PHOSPHOR BRONZE,T=0.10MM  
SHELL: STAINLESS STEEL T=0.12MM

##### 2.FINISH

CONTACT: 50u"Min Ni PLATING OVER ALL  
GOLD FLASH ON CONTACT AREA  
AND GOLD FLASH ON SOLDER AREA  
SHELL: 50u"Min Ni PLATING OVER ALL  
GOLD FLASH ON SOLDER AREA

##### 3.RATED PARAMETERS OF CONNECTOR

3-1.Operating temperature: -40°C to +85°C  
3-2.Rated Current: 0.5A  
3-3.Rater Voltage: 30V AC

##### 4.ELECTRICAL MECHANICAL ENVIRONMENTAL

4-1.Dielectric withstanding Voltage: 500V AC min  
4-2.Insulation Resistance: 1000MΩ Min  
4-3.Durability: 3000 cycles

##### 5.PACKAGE: TAPE REEL, 1000PCS/REEL

THIS ONE HAVE POST

For more information, please help to contact: connmold@foxmail.com, Tel.:18922965797

|                                                                                       |  |                                      |  |                                               |  |
|---------------------------------------------------------------------------------------|--|--------------------------------------|--|-----------------------------------------------|--|
| WWW.connmold.COM                                                                      |  |                                      |  | <div>ConnMold</div>                           |  |
| DIMENSION UNITS                                                                       |  | TOLERANCE                            |  |                                               |  |
| MM                                                                                    |  | X±0.50 .XX±0.25<br>.X±0.35 .XXX±0.15 |  |                                               |  |
| DRWN:Robert                      jan.12,2021                                          |  |                                      |  | PART NAME NANO SIM PUSH TYPE<br>1.37MM HEIGHT |  |
| CHK'D:Yuri                      jan.12,2021                                           |  |                                      |  | PART NUMBER                                   |  |
| APPR:Linda                      jan.12,2021                                           |  |                                      |  | CMNSM661004                                   |  |
|                                                                                       |  |                                      |  | REVISION                                      |  |
|                                                                                       |  |                                      |  | A                                             |  |
| THIRD ANGLE PROJECTION                                                                |  | CUSTOMER P/N                         |  | CUSTOMER                                      |  |
|  |  | /                                    |  | GENERAL MARKET                                |  |
|                                                                                       |  |                                      |  | SHEET NUMBER                                  |  |
|                                                                                       |  |                                      |  | 1 OF 2                                        |  |