

6

5

4


3

2

1



REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Sep. 12, 2021

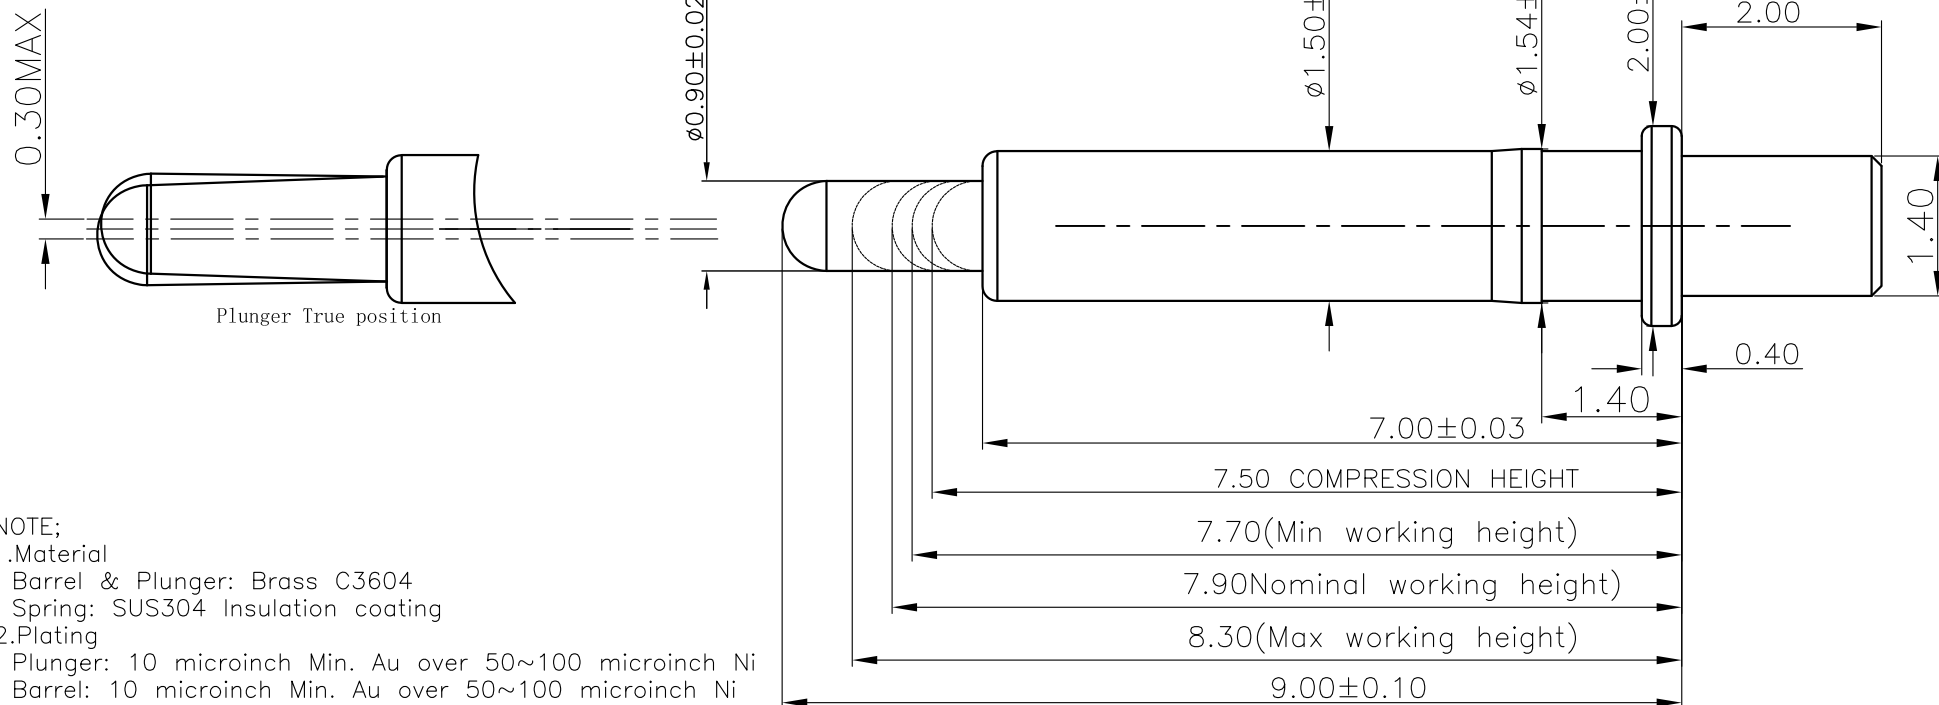

NOTE;

1.Material

Barrel & Plunger: Brass C3604
Spring: SUS304 Insulation coating

2.Plating

Plunger: 10 microinch Min. Au over 50~100 microinch Ni
Barrel: 10 microinch Min. Au over 50~100 microinch Ni

3.Electrical

Rated current & voltage: DC 12V; 2A Max.

Contact resistance: 50 Ω Max. at working height(quiescence)


4.Mechanical

Spring force: 80 $\pm$ 30g at working height(quiescence).

Durability: 10,000 cycles(minimum)

5.To ensure the best usage,please operate it based on the working height.

6.RoHS and HF compliant.



SOLDER PAD

THICKNESS T=1.0mm

TOLERANCE: ± 0.05

For more information, please feel free to contact Neal. His email is :connmold@foxmail.com Tel:18922965797

WWW.connmold.COM		ConnMold	
DIMENSION UNITS	TOLERANCE		
MM	X $\pm$ 0.50 .XX $\pm$ 0.25 .X $\pm$ 0.35 .XXX $\pm$ 0.15	PART NAME POGO PIN 1 PIN MALE TYPE 2.00MM 9.00MM	
DRWN:Robert	Sep. 12, 2021	PART NUMBER CMPGP661007	
CHK'D:Yuri	Sep. 12, 2021	REVISION A	
APPR:Lee	Sep. 12, 2021	SHEET NUMBER 1 OF 1	
THIRD ANGLE PROJECTION 	CUSTOMER P/N /	CUSTOMER GENERAL MARKET	

6

5

4

3

2

1