



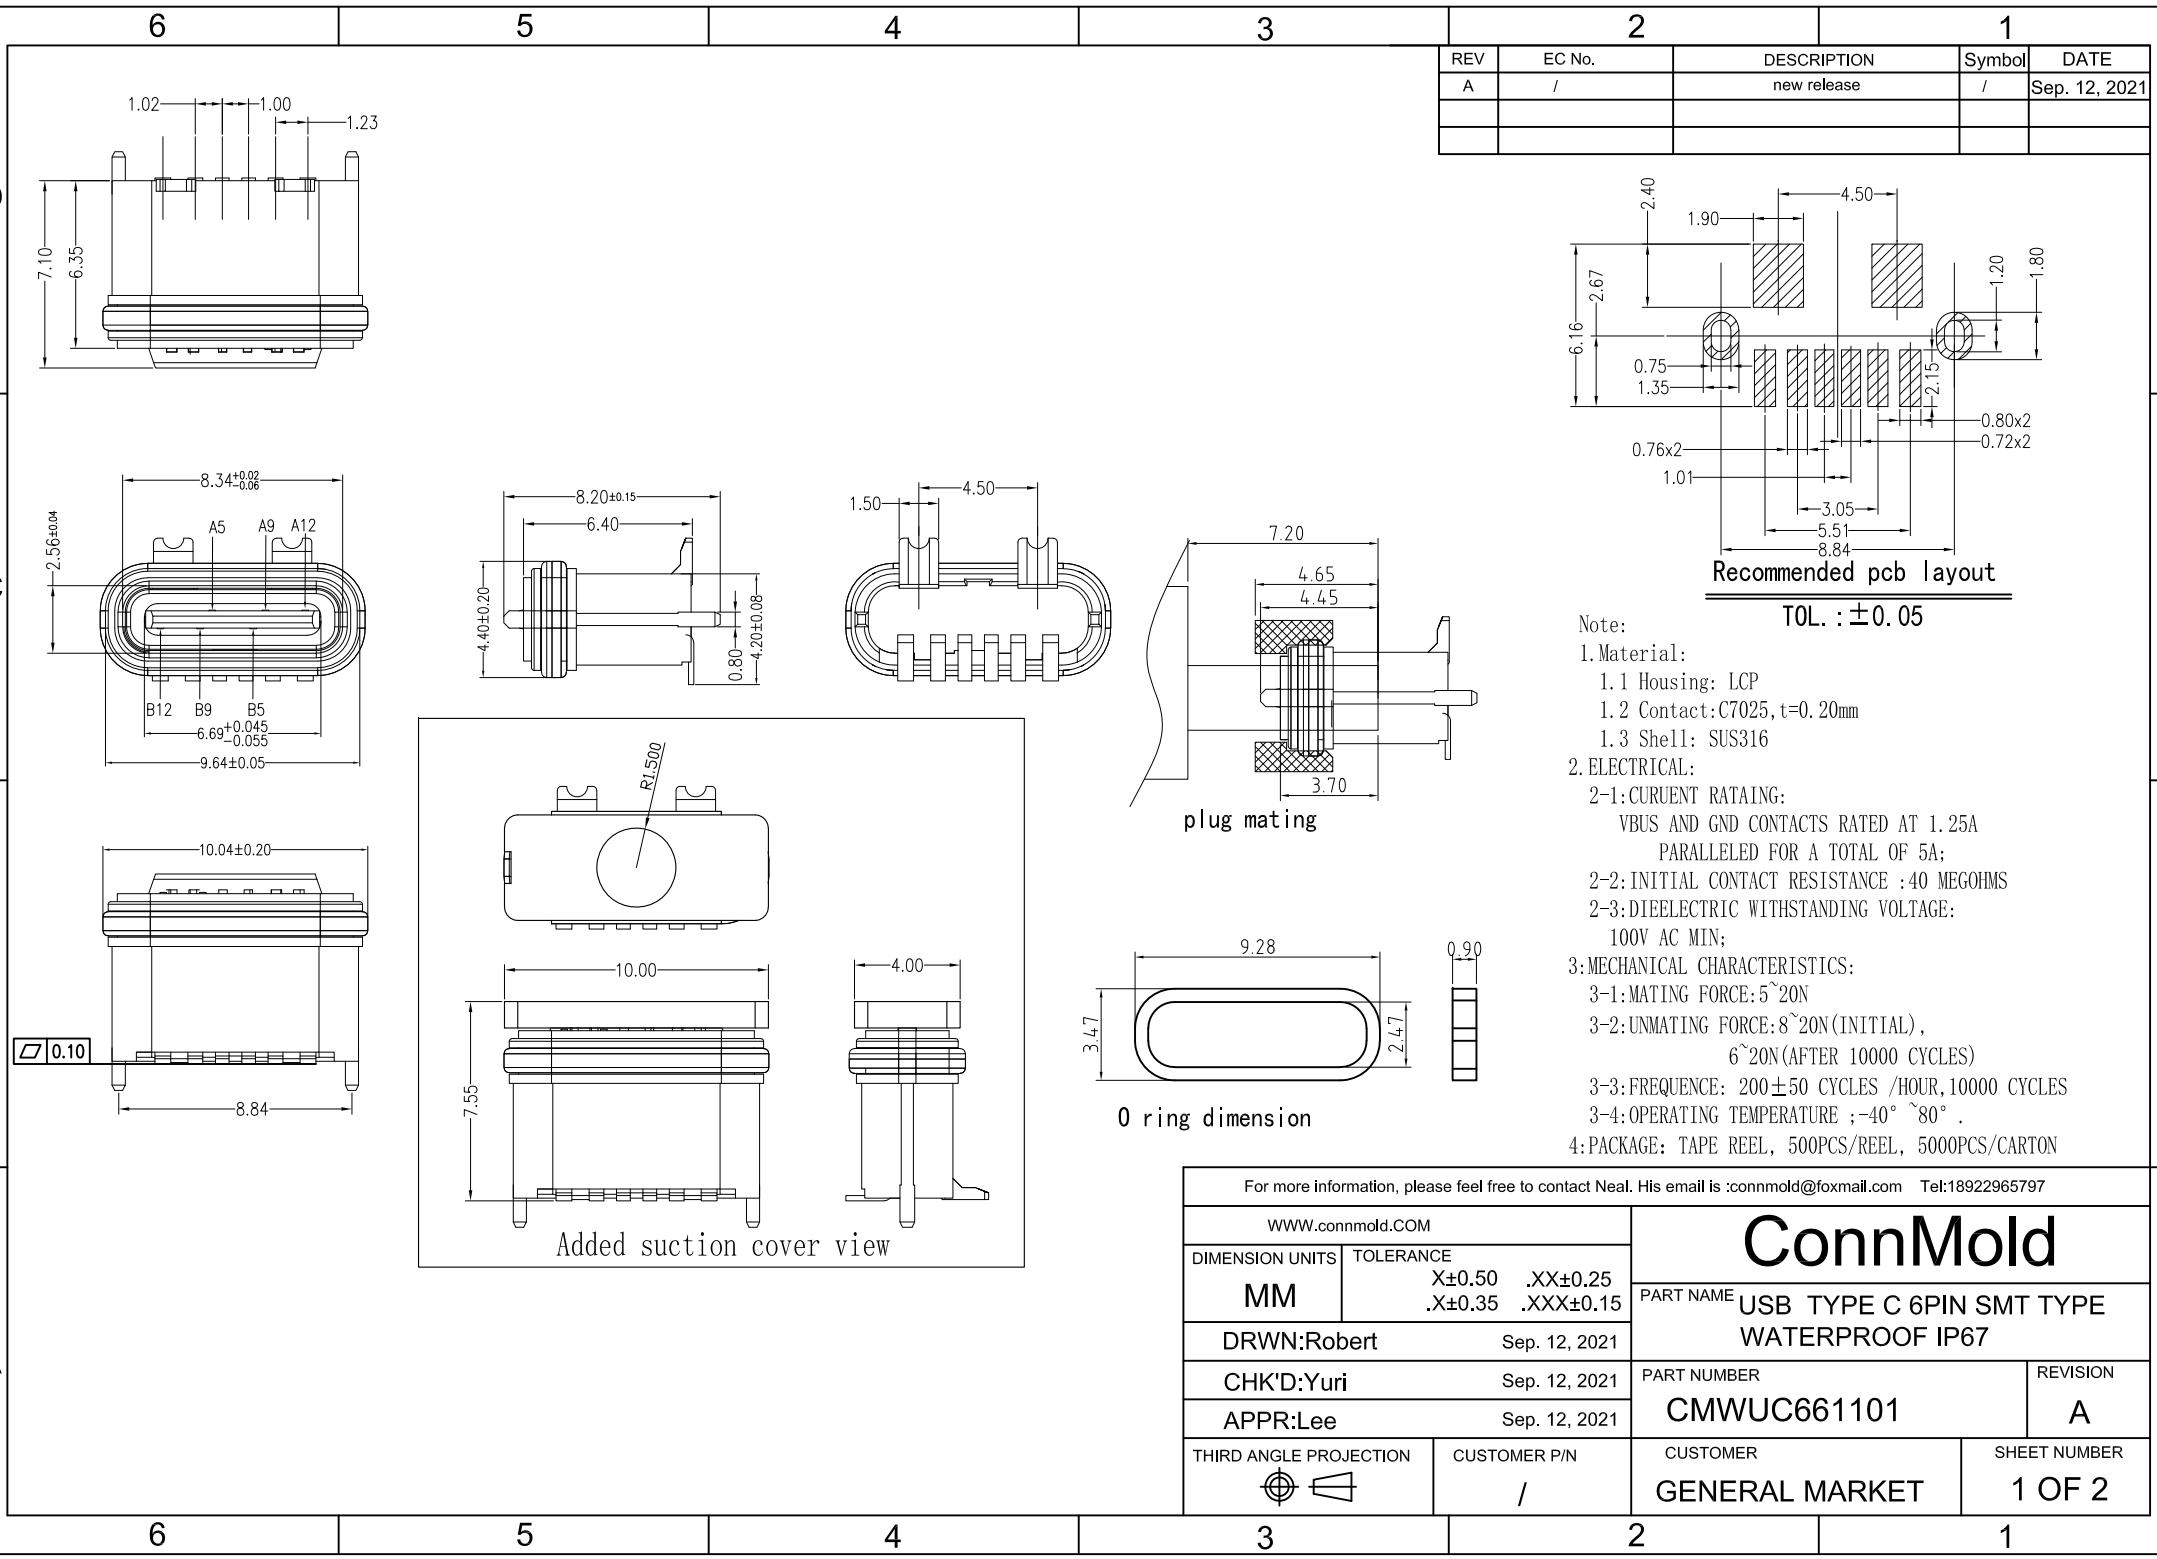

REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Sep. 12, 2021

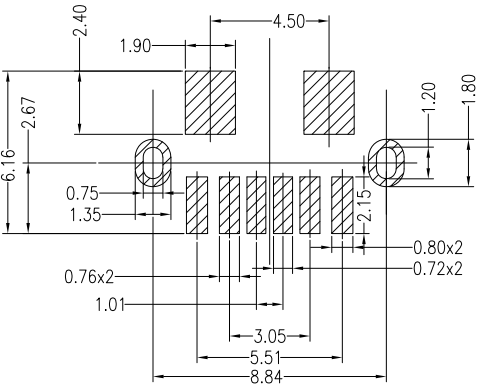

Recommended pcb layout

TOL. : ±0.05

Note:

1. Material:

1.1 Housing: LCP

1.2 Contact: C7025, t=0.20mm

1.3 Shell: SUS316

2. ELECTRICAL:

2-1: CURRENT RATING:

VBUS AND GND CONTACTS RATED AT 1.25A

PARALLELED FOR A TOTAL OF 5A;

2-2: INITIAL CONTACT RESISTANCE : 40 MEGOHMS

2-3: DIELECTRIC WITHSTANDING VOLTAGE:

100V AC MIN;

3: MECHANICAL CHARACTERISTICS:

3-1: MATING FORCE: 5~20N

3-2: UNMATING FORCE: 8~20N (INITIAL),

6~20N (AFTER 10000 CYCLES)

3-3: FREQUENCY: 200±50 CYCLES / HOUR, 10000 CYCLES

3-4: OPERATING TEMPERATURE : -40° ~ 80° .

4: PACKAGE: TAPE REEL, 500PCS/REEL, 5000PCS/CARTON

For more information, please feel free to contact Neal. His email is : connmold@foxmail.com Tel: 18922965797

WWW.connmold.COM		ConnMold	
DIMENSION UNITS	TOLERANCE		
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NAME	USB TYPE C 6PIN SMT TYPE WATERPROOF IP67
DRWN: Robert	Sep. 12, 2021	PART NUMBER	CMWUC661101
CHK'D: Yuri	Sep. 12, 2021	REVISION	A
APPR: Lee	Sep. 12, 2021	CUSTOMER	GENERAL MARKET
THIRD ANGLE PROJECTION	CUSTOMER P/N	SHEET NUMBER	1 OF 2
	/		