


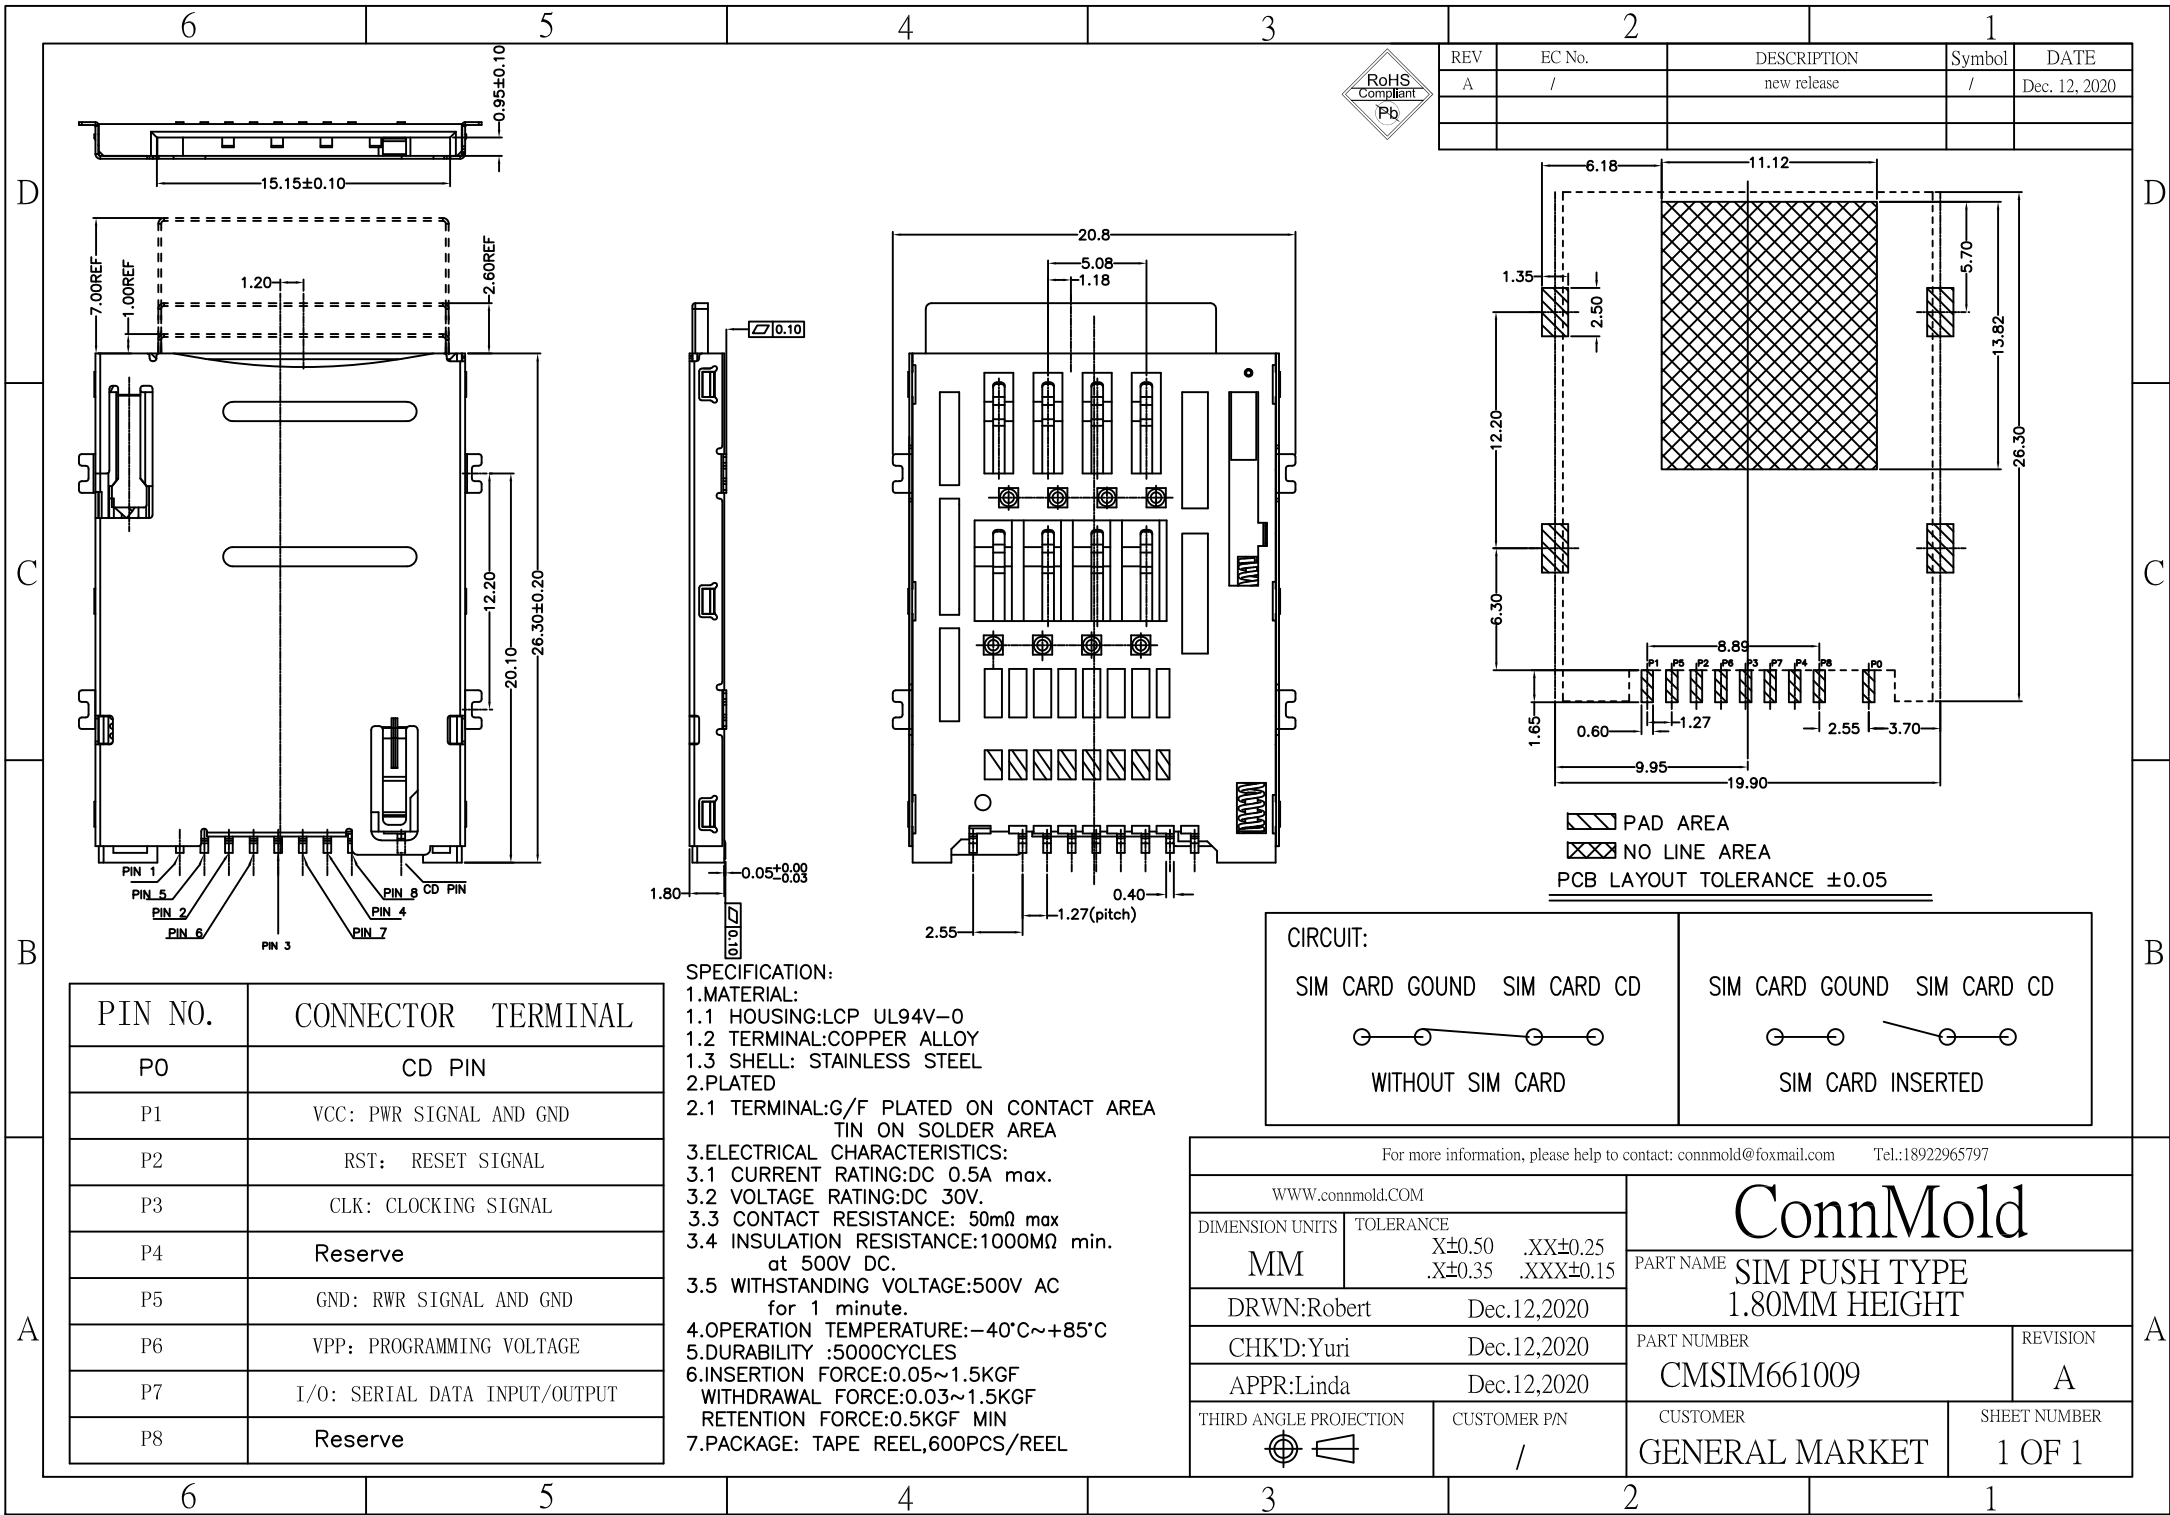

PIN NO.	CONNECTOR TERMINAL
P0	CD PIN
P1	VCC: PWR SIGNAL AND GND
P2	RST: RESET SIGNAL
P3	CLK: CLOCKING SIGNAL
P4	Reserve
P5	GND: RWR SIGNAL AND GND
P6	VPP: PROGRAMMING VOLTAGE
P7	I/O: SERIAL DATA INPUT/OUTPUT
P8	Reserve

SPECIFICATION:

1.MATERIAL:

1.1 HOUSING:LCP UL94V-0

1.2 TERMINAL:COPPER ALLOY

1.3 SHELL: STAINLESS STEEL

2.PLATED

2.1 TERMINAL:G/F PLATED ON CONTACT AREA

TIN ON SOLDER AREA

3.ELECTRICAL CHARACTERISTICS:

3.1 CURRENT RATING:DC 0.5A max.

3.2 VOLTAGE RATING:DC 30V.

3.3 CONTACT RESISTANCE: 50mΩ max

3.4 INSULATION RESISTANCE:1000MΩ min.

at 500V DC.

3.5 WITHSTANDING VOLTAGE:500V AC

for 1 minute.

4.OPERATION TEMPERATURE:-40℃~+85℃

5.DURABILITY :5000CYCLES

6.INSERTION FORCE:0.05~1.5KGF

WITHDRAWAL FORCE:0.03~1.5KGF

RETENTION FORCE:0.5KGF MIN

7.PACKAGE: TAPE REEL,600PCS/REEL