

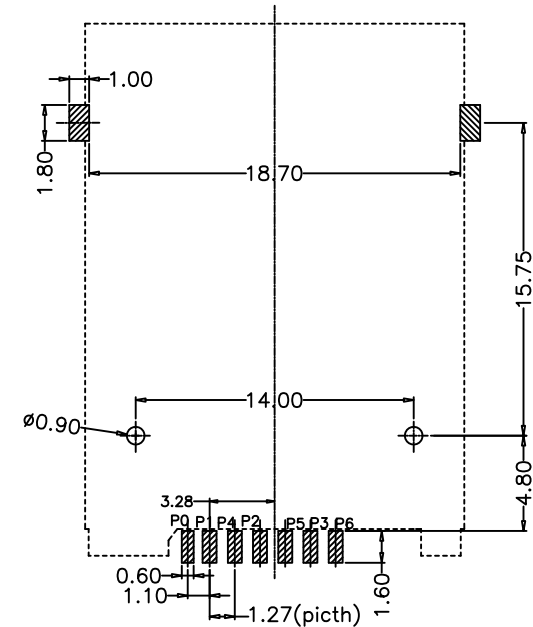


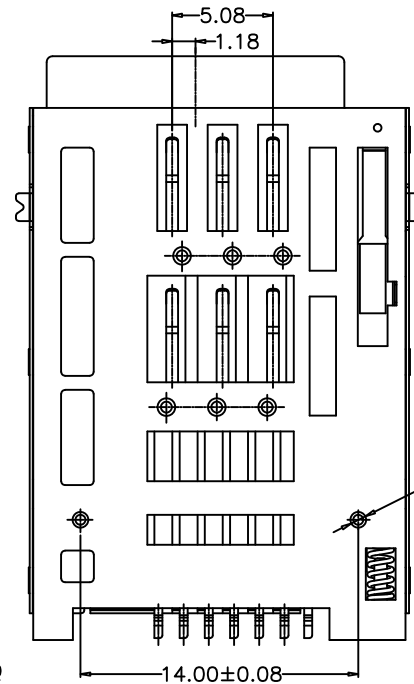

REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Dec. 12, 2020

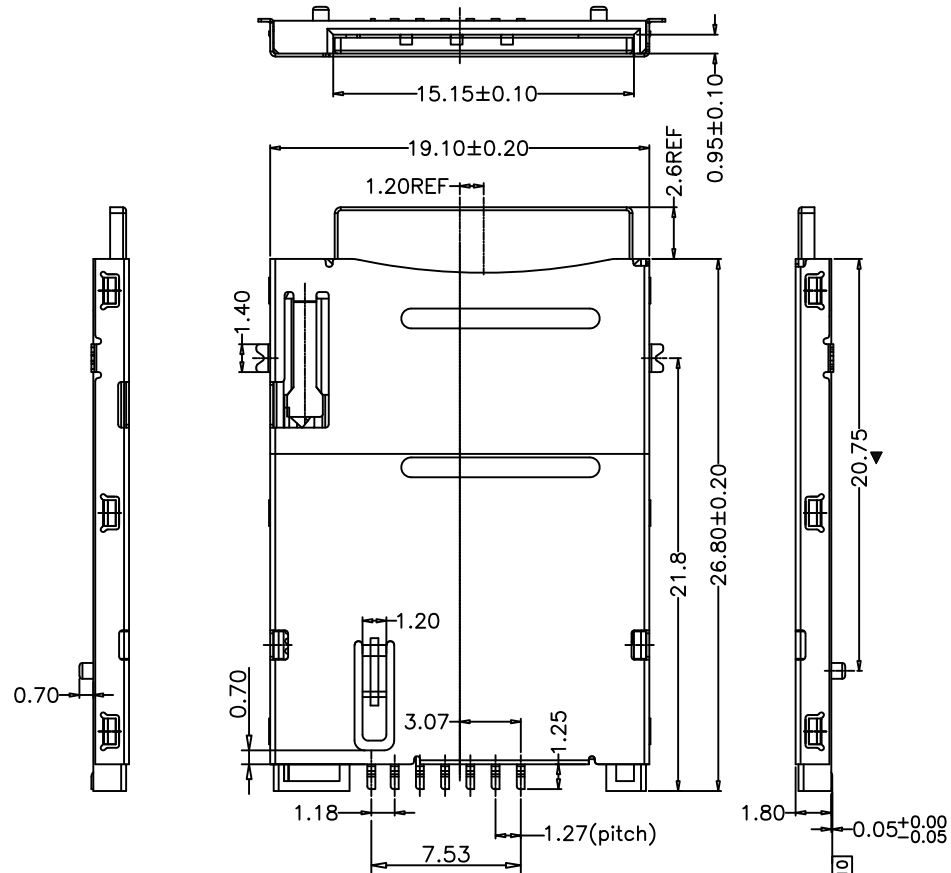

PCB LAYOUT TOLERANCE ±0.05

SPECIFICATION:

- MATERIAL:
 - HOUSING: LCP UL94V-0
 - TERMINAL: COPPER ALLOY
 - SHELL: STAINLESS STEEL
- PLATED
 - TERMINAL: G/F PLATED ON CONTACT AREA
 - TIN ON SOLDER AREA
- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: DC 0.5A max.
 - VOLTAGE RATING: DC 30V.
 - CONTACT RESISTANCE: 50mΩ max
 - INSULATION RESISTANCE: 1000MΩ min. at 500V DC.
 - WITHSTANDING VOLTAGE: 500V AC for 1 minute.
- OPERATION TEMPERATURE: -40°C ~ +85°C
- DURABILITY: 5000 CYCLES
- PACKAGE: TAPE REEL, 600PCS/REEL

CIRCUIT:

SIM CARD GROUND SIM CARD CD



WITHOUT SIM CARD

SIM CARD GROUND SIM CARD CD



SIM CARD INSERTED

PIN NO.	CONNECTOR TERMINAL
P0	CD PIN
P1	VCC: PWR SIGNAL AND GND
P2	RST: RESET SIGNAL
P3	CLK: CLOCKING SIGNAL
P4	Reserve
P5	GND: RWR SIGNAL AND GND
P6	VPP: PROGRAMMING VOLTAGE
P7	I/O: SERIAL DATA INPUT/OUTPUT
P8	Reserve

For more information, please help to contact: connmold@foxmail.com

Tel.: 18922965797

WWW.connmold.COM		ConnMold	
DIMENSION UNITS	TOLERANCE		
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NAME SIM PUSH TYPE 1.80MM HEIGHT	
DRWN: Robert	Dec. 12, 2020	PART NUMBER CMSIM661010 REVISION A	
CHK'D: Yuri	Dec. 12, 2020		
APPR: Linda	Dec. 12, 2020	CUSTOMER GENERAL MARKET SHEET NUMBER 1 OF 1	
THIRD ANGLE PROJECTION	CUSTOMER P/N /		