

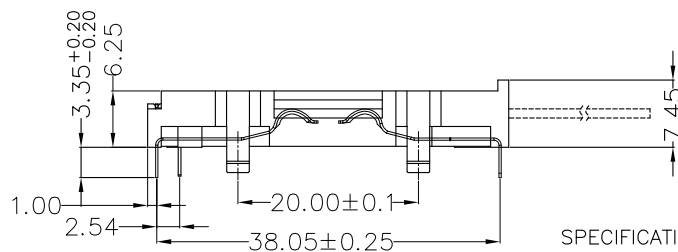


REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Dec. 12, 2020

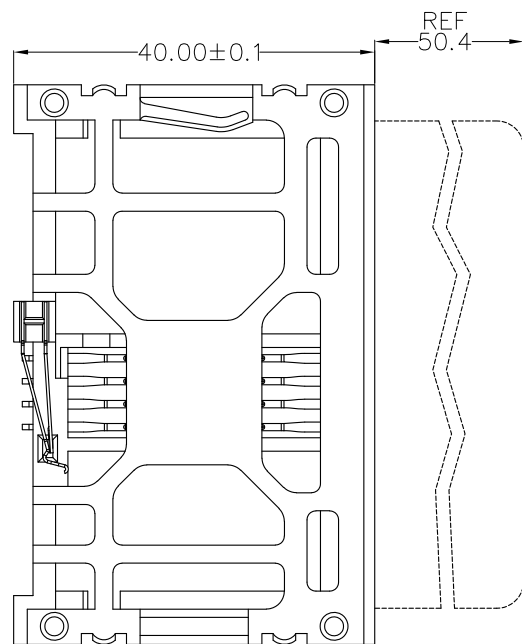

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN






WITHOUT CARD CARD INSERTED

SWITCH OPERATION DIAGRAM

SPECIFICATION:

- 1.MATERIAL:
 - 1.1 HOUSING:LCP UL94V-0
 - 1.2 TERMINAL:COPPER ALLOY
- 2.PLATED
 - 2.1 TERMINAL:G/F PLATED ON CONTACT AREA
TIN ON SOLDER AREA
- 3.ELECTRICAL CHARACTERISTICS:
 - 3.1 CURRENT RATING:DC 0.5A max.
 - 3.2 VOLTAGE RATING:DC 30V.
 - 3.3 CONTACT RESISTANCE: 50mΩ max
 - 3.4 INSULATION RESISTANCE:1000MΩ min.
at 500V DC.
 - 3.5 WITHSTANDING VOLTAGE:500V AC
for 1 minute.
- 4.OPERATION TEMPERATURE:-40°C~+85°C
- 5.DURABILITY :10000CYCLES
- 6.PACKAGE: TRAY PACKAGE

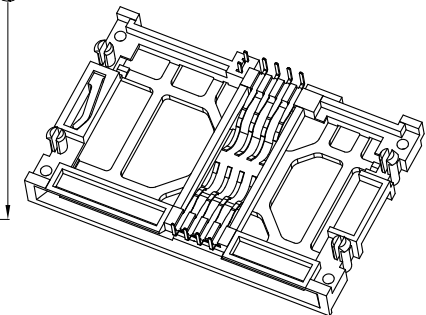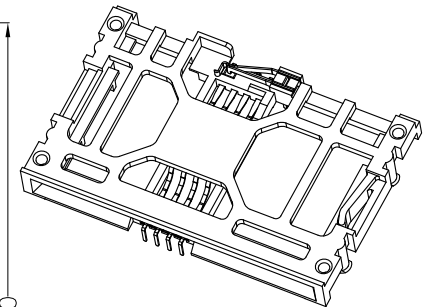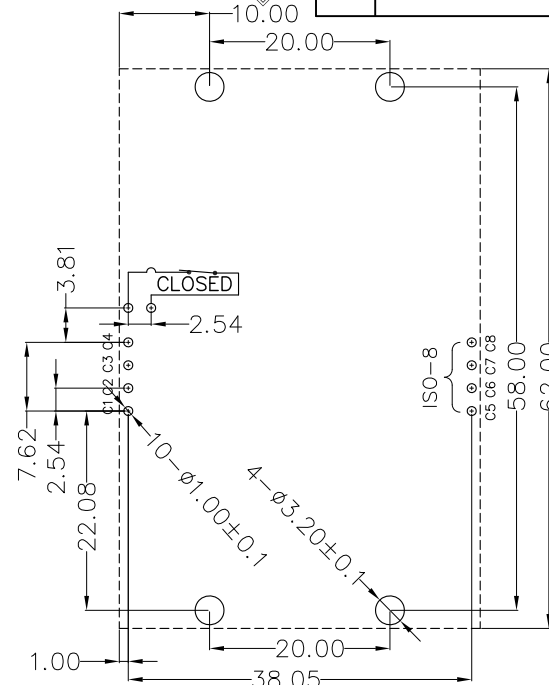

For more information, please help to contact: connmold@foxmail.com

Tel.: 18922965797

WWW.connmold.COM		ConnMold	
DIMENSION UNITS	TOLERANCE		
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NAME SMART CARD CONNECTOR 7.45MM HEIGHT	
DRWN: Robert	Dec. 12, 2020	PART NUMBER CMSIM661011 REVISION A	
CHK'D: Yuri	Dec. 12, 2020		
APPR: Linda	Dec. 12, 2020	CUSTOMER GENERAL MARKET SHEET NUMBER 1 OF 1	
THIRD ANGLE PROJECTION	CUSTOMER P/N /		

